

HEARING PROTECTION

PROPOD™ DISPOSABLE EARPLUGS


PRODUCT DATA SHEET: EPODU | EPODC

PRO
PRO CHOICE SAFETY GEAR

PRODUCT CODE:
EPODU



PRODUCT CODE:
EPODC

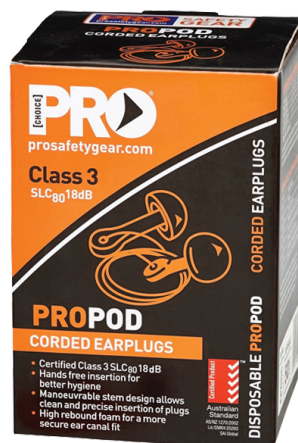

FEATURES AND BENEFITS

- Certified to AS/NZS 1270:2002 Acoustic Hearing Protectors - Class 3 SLC₉₀ 18dB.
- Hearing protection for noise levels to 100dB(A).
- Hi-vis orange for visual identification.
- Hands free of pod tip when inserting for better hygiene.
- Maneuverable stem design allows clean & precise insertion of plugs.
- High rebound foam for a more secure ear canal fit.
- Cord allows earplugs to hang around neck when not in use.

AVAILABLE IN

PRODUCT CODE	UOM	MOQ	CTN QTY
EPODU	EACH	1 BOX (50 PAIRS)	20 BOXES (1000 PAIRS)
EPODC	EACH	1 BOX (50 PAIRS)	20 BOXES (1000 PAIRS)

MAINTENANCE

Before handling any earplugs, ensure hands are clean. Always check your earplugs and discard if damaged, worn or dirty. Silicone plugs can be washed if necessary. Single use ear plugs can cause health issues if used when dirty.

If kept clean and undamaged, silicone (reusable) ear plugs can be used many times over. Clean with mild soap/water and store in a case away from extreme heat and direct sunlight when not in use. On banded earplugs, clean and replace pads regularly as required.

APPLICATIONS

Agriculture, Construction, Fire Protection, Food Services, Forestry, Government, Emergency Services, Manufacturing, Medical, Military, Councils, Mining, Oil and Gas, Pharmaceutical, Steel and Metals, Transportation, Welding, Logistics and Transport, Automotive & Utilities.



COMFORT



HI-VIS



HYGIENIC

PRODUCT DETAILS

Material:	PU Foam PVC Stem & Cord
Length:	3cm
Diameter:	1.5cm
Corded Length:	7.4cm
Weight:	3.1g
Colour:	Hi-Vis Orange Foam & Cord Black Stem

TEST DATA

ATTENUATION TABLE (IN DECIBELS)							
Frequency Hz	125	250	500	1000	2000	4000	8000
Mean Attenuation	25.0	23.0	23.0	24.0	30.0	34.0	36.0
Standard Deviation	12.0	10.0	9.0	10.0	10.0	8.0	10.0
Mean-Minus-Standard Deviation Attenuations	13.0	13.0	13.0	14.0	20.0	26.0	26.0

SLC₉₀ Value is 18 (Class 3)

STANDARDS

CERTIFIED TO:
AS/NZS 1270:2002 Acoustic Hearing Protectors - Class 3 SLC₉₀ 18dB.

When selected, used & maintained as specified in AS/NZS 1269, this protector may be used in noise up to 100dB(A) assuming an 85dB(A) criterion. A lower criterion may require a higher protector class.



AS/NZS 1270:2002
SMKH25293

PARAMOUNT SAFETY PRODUCTS AUSTRALIA
12 FELLOWSHIP ROAD,
GNANGARA, WA 6077
TECH SUPPORT: 1300 275 820
CUSTOMER SERVICE: 1300 770 723
EMAIL: INFO@PARAMOUNTSAFETY.COM

PARAMOUNT SAFETY PRODUCTS NEW ZEALAND
7 SIR WOOLF FISHER DRIVE, HIGHBROOK,
EAST TAMAKI, AUCKLAND 2013
TECH SUPPORT: 0800 888 778
CUSTOMER SERVICE: 0800 888 778
EMAIL: INFO@PARAMOUNTSAFETY.CO.NZ

PROCHOICESAFETYGEAR.COM
PARAMOUNTSAFETY.COM

PRO
PRO CHOICE SAFETY GEAR
FROM
PARAMOUNT
SAFETY PRODUCTS